


DERMARUBBER S

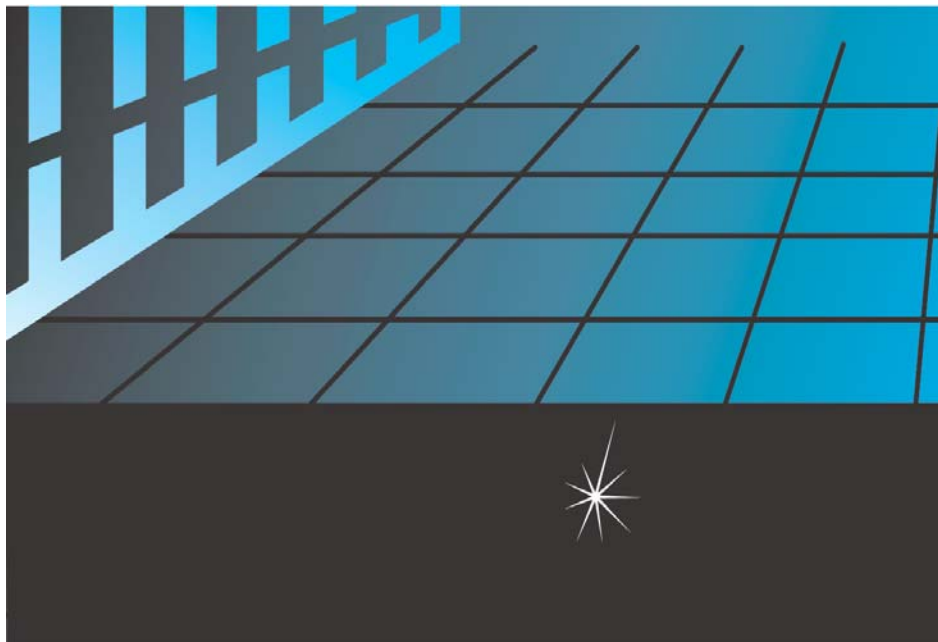

Solvent-based bituminous compound for waterproofing and gluing tiles simultaneously

Characteristics and Use

Dermarubber S is a liquid membrane in elasto-bituminous solution with special fibre-reinforced macromolecules that make the dry product waterproof and highly elastic. Dermarubber S has a double function:

- as waterproofing: on cement or tiled laying surfaces which have lost their waterproofing
- as glue: to glue tiles directly on horizontal or vertical bituminous waterproofing laying surfaces (prefabricated or liquid membranes), cement or old tiled surfaces and to glue shower trays etc. The product is sensitive to UV rays and when applied as a finish coating should be protected by one or two coats of Reflex, Reflex AR or Derma-color.

Recommended primers

Dermaprimer - Idroprimer

Preparation of the laying surface

When used as glue for tiles, the laying surface must be perfectly level.

Important instructions

Minimum and maximum environment and laying surface coating temperatures: MIN 5°C, MAX 40°C. May be applied on laying surfaces where backwater is present. Use small tiles to ensure proper drying. Fill in the tile joints only when product is perfectly dry (after 2/3 days).

Regulations

(according to EEC regulations)
 Symbol HARMFUL
 Risk level R20 Do not inhale



CHARACTERISTICS OF THE LIQUID PRODUCT

Specific weight	1.09 ± 0,05 Kg/dm ³
Dry residue	74 ± 1%
Appearance	Black thixotropic compound

DRYING OR HARDENING AT 23°C AND 50% RH

Surface	1 h
To touch	3 h
Interval between coatings	24 h

CHARACTERISTICS OF THE DRY PRODUCT

Load at break	1.04 ± 0.10 N/mm ²
Elongation at break	1600 ± 200%
Flexibility at low temperatures	-30 ± 5°C
Flexibility at low temperatures after U.V. ageing	-30 ± 5°C
Flexibility at low temperature after thermal ageing	-30 ± 5°C

TOOLING	THINNER	TYPE OF THINNER	CLEANING METHOD
Squeegee	Ready to use	as required	Thinner R1
Roller/Brush	Approx. 20%	Thinner R1	

COVERAGE	LAYING SURFACE
Approx. 1 kg per sq.m. in 2 coatings as waterproofing and approx. 1 kg per sq.m. as glue	Clean and dry

STORAGE INSTRUCTIONS

Storage temperature	MIN. -5°C MAX 40°C
Pot life	24 months
Container sizes	5 - 10 - 20 kg
Colours available	Black

rev. 01/04